

COLD WATER – TWO-WHEEL

## The K 1152-Series

**One-piece Roto-Mold chassis**  
Virtually indestructible

**Integrated Hose drum**

Practical design and features a longer length high-pressure hose complete with folding crank (K 1152 TST)

**Cleaning Agent Intake**

Injector system for dispensing of cleaning agents

**Pressure regulation**


Fully adjustable control allows operating pressures to be set to suit any task

**Total-stop system**


Auto-shutdown feature improves seal life-span and reduces power consumption

**Neat storage system**

Practical stowing of the trigger gun with safety catch and lances

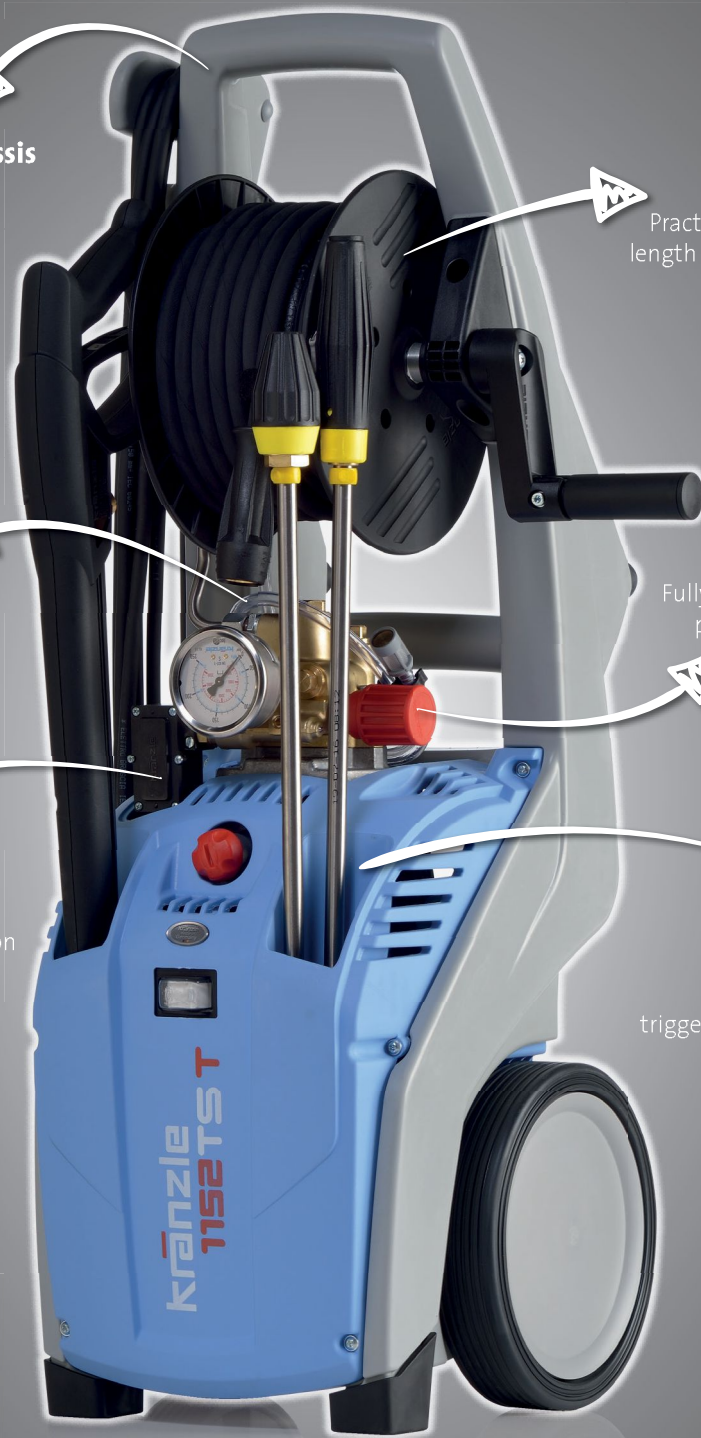

Figures: K 1152 TST

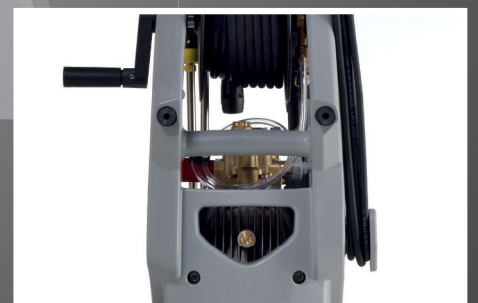



**TOP  
SELLER**



Technical specifications	K 1152 TS		K 1152 TST		
	without hose drum		incl. hose drum		
Operating pressure adjustable	bar / MPa	30-130 / 3-13		30-130 / 3-13	
Max. admissible overpressure	bar / MPa	150 / 15		150 / 15	
Connected load	V / ~ / Hz / A	230 / 1 / 50 / 12		230 / 1 / 50 / 12	
Motor speed	Rpm	2800		2800	
Water output	l/min   l/h	10	600	10	600
Power intake / Power output	kW   kW	2.8	2.0	2.8	2.0
Power supply cable	m	5		5	
Dimensions L x W x H	mm	360 / 365 / 870		360 / 365 / 870	
Weight	kg	29		31.5	
Cleaning Agent Intake		●		●	
Equipment					
Hose drum		-		●	
Steel braided high-pressure hose	m	10		15	
Trigger gun with safety catch	Model	M2000		M2000	
Dirtkiller lance	Nozzle size	● 042		● 042	
Vario-Jet lance	Nozzle size	● 042		● 042	
		without Dirtkiller lance	incl. Dirtkiller lance	incl. Dirtkiller lance	
<b>Ord.no.</b>		<b>41219</b>	<b>412191</b>	<b>412181</b>	



For detailed technical information, see page 75