

COLD WATER – TWO-WHEEL

## The Profi-Series

### One-piece Roto-Mold chassis

Virtually indestructible

### Integrated water tank

Prevents damage to the high-pressure pump caused by a lack of water

### Neat storage system

Practical stowing of the trigger gun with safety catch and lances

### Integrated Hose drum

Practical design and features a longer length high-pressure hose complete with folding crank

### Total-stop system


Auto-shutdown feature improves seal life-span and reduces power consumption

### Cleaning Agent Intake


Injector system for dispensing of cleaning agents

### Pressure regulation

Fully adjustable control allows operating pressures to be set to suit any task

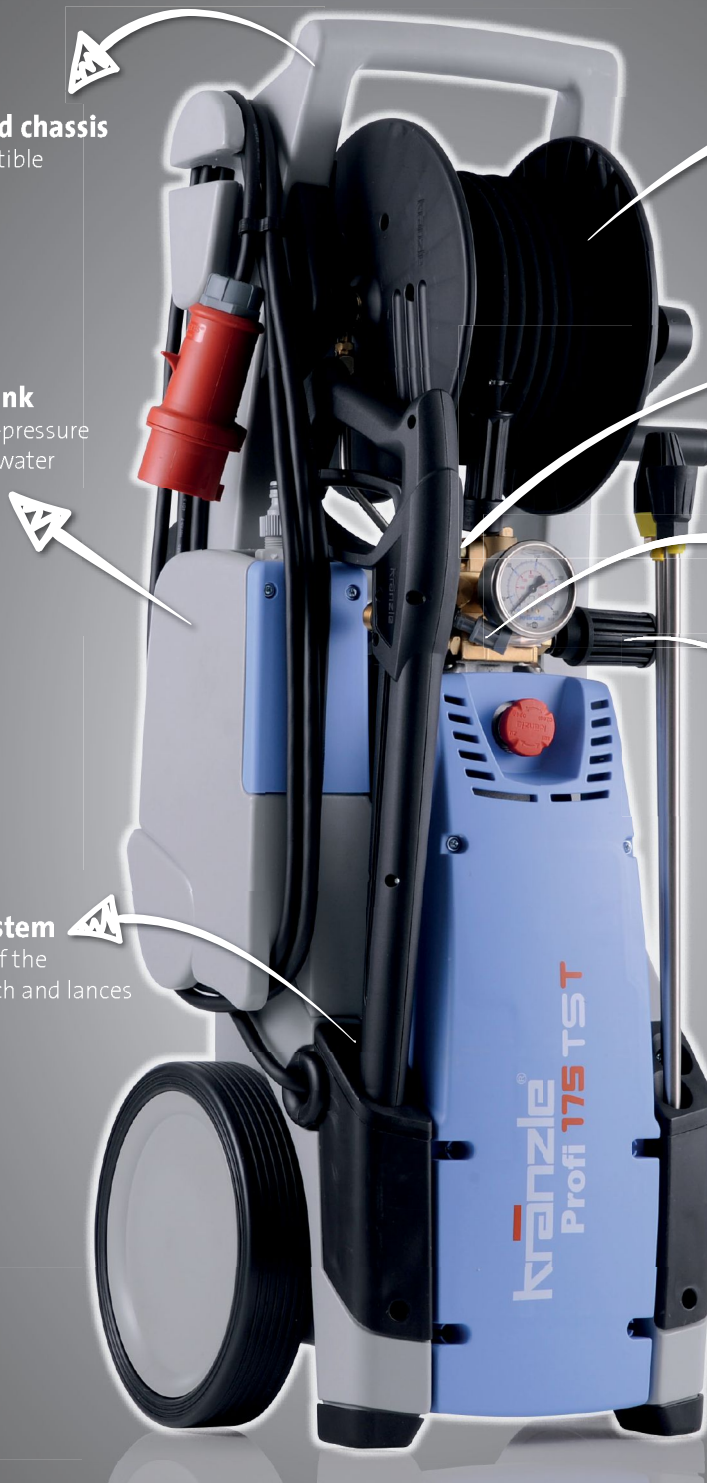

Figures: Profi 175 TST

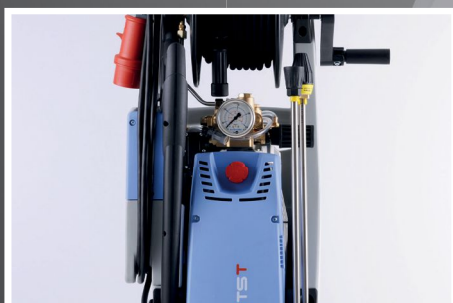



		Profi 160 TST	Profi 195 TST	Profi 175 TST
<b>Technical specifications</b>				
Operating pressure adjustable	bar / MPa	30-140 / 3-14	30-170 / 3-17	30-150 / 3-15
Max. admissible overpressure	bar / MPa	160 / 16	195 / 19.5	175 / 17.5
Connected load	V / ~ / Hz / A	230 / 1 / 50 / 14.3	230 / 1 / 50 / 14.3	400 / 3 / 50 / 7.2
Motor speed	Rpm	1400	1400	1400
Water output	l/min   l/h	11   660	8   480	12   720
Power intake / Power output	kW   kW	3.2   2.5	3.2   2.5	3.8   3.0
Power supply cable	m	5	5	5
Dimensions L x W x H	mm	355 / 375 / 980	355 / 375 / 980	355 / 375 / 980
Weight	kg	45	45	45
Cleaning Agent Intake		●	●	●
<b>Equipment</b>				
Hose drum		●	●	●
Steel braided high-pressure hose	m	15	15	15
Trigger gun with safety catch	Model	M2000	M2000	M2000
Dirtkiller lance	Nozzle size	● 042	○ 03	● 042
Stainless steel lance with flat jet nozzle	Nozzle size	● M20042	○ M2003	● M20042
<b>Ord.no.</b>		<b>412301</b>	<b>412311</b>	<b>412321</b>



## TECHNICAL HIGHLIGHTS!

### INTEGRATED WATER TANK

The integrated water tank mostly prevents pump damage from lack of water.

The water tank can be removed in a few steps when the device is required to suck water from a larger external water tank or reservoir.

For detailed technical information, see page 76-77