

ACCESSORY RANGE FOR HIGH-PRESSURE CLEANERS

THE RIGHT ACCESSORIES FOR ANY CLEANING TASK!



EXPERT TIP!

THE KRÄNZLE ACCESSORY RANGE

Kränzle accessories will expand the area of use of your high-pressure cleaners. Discover the diverse applications and face any cleaning task.

Find the right accessories for your high-pressure cleaner quickly.

For more on this, see page 60-67
(Accessory compatibility for standard units)

ACCESSORY RANGE FOR HIGH-PRESSURE CLEANERS

FLOOR CLEANERS



Round Cleaner UFO short		
Ø	mm	300
Operating pressure max.	bar / MPa	180 / 18
Water output max.	l/min	12
Temperature max.	°C	60
Weight	kg	1.9
Inlet	M22x1,5 male	
Nozzle size	045	

■ for small to medium-sized surfaces

Ord.no. 41855



Round Cleaner UFO long		
Ø	mm	300
Operating pressure max.	bar / MPa	180 / 18
Water output max.	l/min	12
Temperature max.	°C	60
Weight	kg	2.2
Inlet	M22x1,5 male	
Nozzle size	045	

■ for small to medium-sized surfaces

Ord.no. 41850



Round Cleaner UFO long stainless steel		
Ø	mm	350
Operating pressure max.	bar / MPa	210 / 21
Water output max.	l/min	15
Temperature max.	°C	60
Weight	kg	5.5
Inlet	M22x1,5 male	
Nozzle size	045	055

■ for small to medium-sized surfaces

Ord.no. 41861 41860



Round Cleaner stainless steel		
Ø	mm	300
Operating pressure max.	bar / MPa	250 / 25
Water output max.	l/min	15
Temperature max.	°C	60
Weight	kg	4.4
Inlet	M22x1,5 male	
Nozzle size (factory fitted)	055	

■ for medium-sized to large surfaces

Ord.no. 41105



Round Cleaner stainless steel		
Ø	mm	420
Operating pressure max.	bar / MPa	250 / 25
Water output max.	l/min	19
Temperature max.	°C	60
Weight	kg	9
Inlet	M22x1,5 male	
Nozzle size (factory fitted)	055	

■ for large to very large surfaces

Ord.no. 41106



Round Cleaner stainless steel		
Ø	mm	520
Operating pressure max.	bar / MPa	250 / 25
Water output max.	l/min	19
Temperature max.	°C	60
Weight	kg	16
Inlet	M22x1,5 male	
Nozzle size (factory fitted)	055	

■ for large to very large surfaces

Ord.no. 41107



Please indicate the technical data of the high-pressure cleaner when placing your order.

ACCESSORY RANGE FOR HIGH-PRESSURE CLEANERS

WATER FILTERS / WASHING BRUSHES / MISCELLANEOUS



Water filter

Inlet	3/4" male	3/4" male
Outlet	3/4" female	3/4" female

- 13310: With plastic water inlet and brass outlet
- 133003: With brass water inlet and outlet

Ord.no.	13310	133003
----------------	--------------	---------------



Water filter

Inlet	3/4" male
Outlet	3/4" female

- With brass water fitting

Ord.no.	133201
----------------	---------------



Fig. Spray guard



Cleaning brush rotating

Brush head Ø	mm	180
Stainless steel extension	mm	400
Water output max.	l/min	20
Temperature max.	°C	35
Inlet		M22x1,5 male

- For gentle cleaning in case of stubborn dirt at vehicles and facades

Ord.no.	410501
----------------	---------------



Cleaning brush flat

Brush head LxB	mm	180x65
Temperature max.	°C	35
Inlet		M22x1,5 male

- For gentle cleaning in case of stubborn dirt at vehicles and facades

Ord.no.	41073
----------------	--------------



Cleaning brush transverse

Brush head LxW	mm	240x90
Temperature max.	°C	35
Inlet		M22x1,5 male

- For gentle cleaning in case of stubborn dirt at vehicles and facades

Ord.no.	410500
----------------	---------------



Spray guard

Ø below	mm	220
---------	----	-----

- for all washing lances
- Dramatically reduces spray-back

Ord.no.	41052
----------------	--------------



Transmission oil / High-performance transmission oil

Filling quantity	l	1	1
for high-pressure pumps	AZ / AP / APG	AM / AG	

- 400922: Transmission oil
- 400932: High-performance transmission oil

Ord.no.	400922	400932
----------------	---------------	---------------



Universal wall bracket for accessories „Butler“

Dimensions LxBxH	mm	425x240x280
------------------	----	-------------

- Supplied without accessories
- Professional space-saving storage of accessories

Ord.no.	41262
----------------	--------------

Please indicate the technical data of the high-pressure cleaner when placing your order.

ACCESSORY RANGE FOR HIGH-PRESSURE CLEANERS

FOAMING INJECTOR LANCES / CLEANING AGENTS



NEW!

Foaming injector lances - threaded fitting

Operating pressure max. bar / MPa	250 / 25	
Temperature max. °C	30	
Weight (unfilled) kg	0.34	0.38
Inlet	M22x1,5 male	
Nozzle size	03	
Container	Liter	1 2

- with threaded connection
- Production of highly effective foam.

Ord.no. **135301** | **135311**



NEW!

Foaming injector lances - quick-release fitting

Operating pressure max. bar / MPa	250 / 25	
Temperature max. °C	30	
Weight (unfilled) kg	0.35	0.39
Inlet	Quick release insert D12	
Nozzle size	03	
Container	Liter	1 2

- with quick-release fitting
- Production of highly effective foam.

Ord.no. **135303** | **135313**



Cleaning agent injector kit

Inlet	M22x1,5 male
Nozzle size	028 042

- incl. stainless steel lance with regulating nozzle
- For low pressure dispensing of cleaning agents

Ord.no. **133767** | **133766**

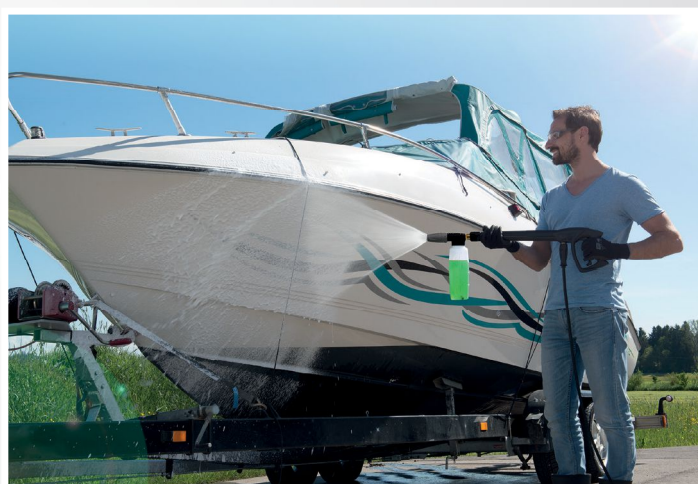


Fig. Foam injectors with threaded fitting



Universal cleaner Alfa Neutral

pH value**	10.9	
Container	Liter	5 25

- Universal cleaner for removal of strong contaminations

Ord.no. **412589** | **412588**



Foam cleaner Alfa Plus

pH value**	13.2	
Container	Liter	5 25

- Special cleaner to degrease and clean

Ord.no. **412700** | **412709**



Special cleaner Alfa Marine

pH value**	13.5	
Container	Liter	5 25

- for cleaning motors
- specifically for restoration after fire damage
- Alkaline; can be diluted with water

Ord.no. **412584** | **412583**



Decalcifying (concentrate)

pH value**	1.0	
Container	Liter	1 12 x 1

- Descaling of hot and cold water high-pressure cleaners
- Removal of lime deposits

Ord.no. **412580** | **412570**

Important note:

When using chemical cleaning agents, observe the respective regulations, provisions, safety notes and safety data sheets.



**pH value: Undiluted

We recommend testing the cleaning agent on the surface to be cleaned before starting.

Please indicate the technical data of the high-pressure cleaner when placing your order.

ACCESSORY RANGE FOR HIGH-PRESSURE CLEANERS

PIPE-CLEANING HOSES / SUCTION ATTACHMENTS



Pipe-cleaning hose	
Operating pressure max. bar / MPa	200 / 20
Water output max. l/min	19
Temperature max. °C	60
Inlet	M22x1,5 male
Nozzle size (factory fitted)	KN 055
Hose length m	10 15 20 25 30
■ For areas difficult to access such as outflows and gutters	
Ord.no.	410581 41058 410582 410583 410584

Pipe-cleaning hose with additional forward firing jet	
Operating pressure max. bar / MPa	200 / 20
Water output max. l/min	19
Temperature max. °C	60
Inlet	M22x1,5 male
Nozzle size with front bore	KNF 055
Hose length m	10 15 20 25 30
■ For areas difficult to access such as outflows and gutters	
Ord.no.	410581-F 41058-F 410582-F 410583-F 410584-F



Sand-blasting injector	
Operating pressure max. bar / MPa	250 / 25
Water output max. l/min	19
for blasting material grain mm	0.2 - 2
Inlet	M22x1,5 male
Nozzle size	D00055
■ for blasting sandstone and facades	
Ord.no.	41068




Suction hose - with suction filter	
Hose length m	3
Inlet	3/4" female
■ with check valve	
■ for high-pressure cleaners with an output below 10 l/min, shorten the hose to 1.5 m	
Ord.no.	150383



Fig. Pipe-cleaning hose



Sludge sucker	
Hose length m	3.5
Operating pressure max. bar / MPa	250 / 25
Water output max. l/min	20
Temperature max. °C	60
Suction height max. m	3
Suction power at 130 bar / 220 bar l/h	10000 / 17500
Inlet	M22x1,5 male
Nozzle size (factory fitted)	M20055
■ Extraction of mud from pools and ponds	
Ord.no.	41104



Sludge sucker stainless steel	
Length m	2
Operating pressure max. bar / MPa	250 / 25
Water output max. l/min	20
Temperature max. °C	60
Suction height max. m	3
Suction power at 130 bar / 220 bar l/h	10000 / 17500
Inlet	M22x1,5 male
Nozzle size (factory fitted)	D00045
■ Extraction of mud from pools and ponds	
Ord.no.	41801



Mud-extractor attachment	
Dimensions L mm	300
Inlet	M22x1,5 male
Nozzle size (factory fitted)	D00045
■ Attachment for stainless steel mud extractor	
■ for pool cleaning	
Ord.no.	41802

Please indicate the technical data of the high-pressure cleaner when placing your order.

ACCESSORY RANGE FOR HIGH-PRESSURE CLEANERS

TRIGGER GUNS WITH SAFETY CATCH

M2000	
Operating pressure max. bar / MPa	270 / 27
Water output max. l/min	30
Temperature max. °C	150



M2000 - short version	
Inlet	M22x1,5 male
Outlet	1/4" female

M2000 - short version	
Inlet	3/8" female
Outlet	1/4" female

Ord.no. **12490**

Ord.no. **12493**



M2000 - short version	
Inlet	M22x1,5 male
Outlet	M22x1,5 female

M2000 - short version	
Inlet	M22x1,5 male
Outlet	D12

■ with threaded fitting

■ with quick-release fitting

Ord.no. **12491**

Ord.no. **12492**



M2000 - with extension	
Inlet	M22x1,5 male
Outlet	M22x1,5 female

M2000 - with extension	
Inlet	M22x1,5 male
Outlet	D12

■ with threaded fitting

■ with quick-release fitting

Ord.no. **12480**

Ord.no. **12481**



M2000 - One-piece version	
Inlet	M22x1,5 male
Nozzle size	● D25045 ● D25055 ● D2507

■ with cranked stainless steel lance and flat jet nozzle

Ord.no. **12486-D25045** | **12486-D25055** | **12486-D2507**

STARLET	
Operating pressure max. bar / MPa	250 / 25
Water output max. l/min	40
Temperature max. °C	150



Starlet - short version	
Inlet	M22x1,5 male
Outlet	1/4" female

Starlet - short version	
Inlet	3/8" female
Outlet	1/4" female

Ord.no. **12326**

Ord.no. **12320**



Starlet - short version	
Inlet	M22x1,5 male
Outlet	M22x1,5 female

Starlet - short version	
Inlet	M22x1,5 male
Outlet	D12

■ with threaded fitting

■ with quick-release fitting

Ord.no. **123271**

Ord.no. **123272**



Starlet - with extension	
Inlet	M22x1,5 male
Outlet	M22x1,5 female

Starlet - with extension	
Inlet	M22x1,5 male
Outlet	D12

■ with threaded fitting

■ with quick-release fitting

Ord.no. **123202**

Ord.no. **12328**



Starlet - One-piece version	
Inlet	M22x1,5 male
Nozzle size	● D2507 ● D2508 ● M20125

■ with cranked stainless steel lance and flat jet nozzle

Ord.no. **123203-D2507** | **123203-D2508** | **123203-M20125**

Please indicate the technical data of the high-pressure cleaner when placing your order.

ACCESSORY RANGE FOR HIGH-PRESSURE CLEANERS

LANCES WITH THREADED FITTINGS



Stainless steel lance with flat jet nozzle

- with stainless steel tube
- Inlet: M22x1,5 male

Nozzle size	Length mm	Ord.no.
M20028	500	12393-M20028
M2003	500	12393-M2003
M20042	500	12393-M20042
M20045	500	12393-M20045
D2507	500	12393-D2507
M2008	600	123922-M2008
M2010	600	123922-M2010
M2011	600	123922-M2011
M20035	600	123922-M20035
M20045	600	123922-M20045
M20125	600	123922-M20125
D2504	600	123922-D2504
D2505	600	123922-D2505
D2506	600	123922-D2506
D2507	600	123922-D2507
D25045	600	123922-D25045




Fig. Version with threaded fittings



Dirtkiller lances

- with stainless steel tube
- Inlet: M22x1,5 male
- max. 20 l/min
- max. 220 bar / 22 MPa
- max. 70 °C

Nozzle size	Length mm	Ord.no.
028	500	41570-028
03	500	41570-03
042	500	41570-042
045	500	41570-045
055	500	41570-055
07	500	41570-07
035	600	46150
045	600	461501
055	600	461503
06	600	461502



Turbokiller lance

- with stainless steel tube
- Inlet: M22x1,5 male
- max. 30 l/min
- max. 320 bar / 32 MPa
- max. 80 °C

Nozzle size	Length mm	Ord.no.
04	600	41072
045	600	410723
05	600	41580-05
055	600	410724
07	600	410727
08	600	410728
10	600	41580-10
11	600	41580-11



Stainless steel lance with regulating nozzle

- with stainless steel tube
- Inlet: M22x1,5 male
- max. 250 bar / 25 MPa
- max. 150 °C

Nozzle size	Length mm	Ord.no.
M20042	500	12701-M20042
D2503	600	12395-D2503
D2504	600	12395-D2504
D2505	600	12395-D2505
D2507	600	12395-D2507
D25045	600	12395-D25045
D25055	600	12395-D25055



Vario-Jet lance

- with stainless steel tube
- Inlet: M22x1,5 male
- max. 16 l/min
- max. 200 bar / 20 MPa
- max. 80 °C

Nozzle size	Length mm	Ord.no.
03	500	411568-03
042	500	411568-042
055	500	411568-055

Please indicate the technical data of the high-pressure cleaner when placing your order.

LANCES WITH QUICK-RELEASE FITTINGS

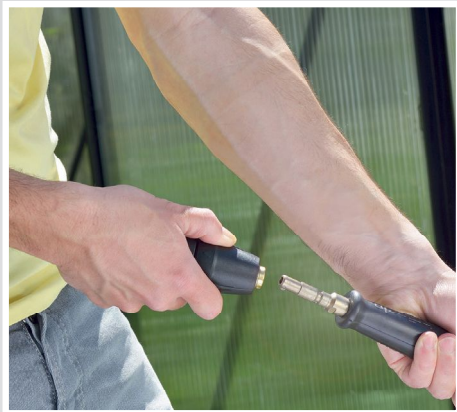


Fig. Version wit quick-release fittings

Stainless steel lance with flat jet nozzle

- with stainless steel tube
- with thermal protective grip
- Inlet: Quick release insert D12

Nozzle size	Length mm	Ord.no.
○ D2503	1000	12420-D2503
● D25045	1000	12420-D25045
● D25055	1000	12420-D25055
● D2507	1000	12420-D2507
● D25075	1000	12420-D25075
● D4011	1000	12420-D4011
● D40125	1000	12420-D40125
D4015	1000	12420-D4015
D40175	1000	12420-D40175
D4020	1000	12420-D4020
1/4" female, without nozzle	1000	12420

EXPERT TIP!

QUICK-RELEASE FITTINGS

Nearly all Kränzle high-pressure cleaners supplied with threaded fittings as standard equipment can be ordered with quick-release fittings.


Availability on pages 74-87 (Technical data)



Dirtkiller lance

- with stainless steel tube
- with thermal protective grip
- Inlet: Quick release insert D12
- max. 20 l/min
- max. 220 bar / 22 MPa
- max. 70 °C

Nozzle size	Length mm	Ord.no.
● 045	1000	12425-045
● 055	1000	12425-055
● 07	1000	12425-07
● 075	1000	12425-075
1/4" female, without nozzle	1000	12442



Turbokiller lance

- with stainless steel tube
- with thermal protective grip
- Inlet: Quick release insert D12
- max. 30 l/min
- max. 320 bar / 32 MPa
- max. 80 °C

Nozzle size	Length mm	Ord.no.
● 04	1000	12430-04
● 045	1000	12430-045
● 055	1000	12430-055
● 07	1000	12430-07
● 10	1000	12430-10
● 11	1000	12430-11
12	1000	12430-12
15	1000	12430-15
18	1000	12430-18
20	1000	12430-20
1/4" female, without nozzle	1000	12442

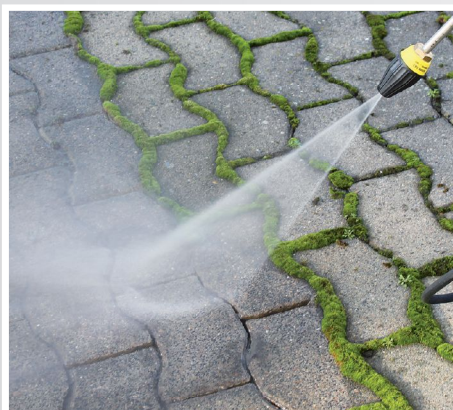


Fig. Dirtkiller lance

Please indicate the technical data of the high-pressure cleaner when placing your order.

ACCESSORY RANGE FOR HIGH-PRESSURE CLEANERS

SPECIAL LANCES



Fig. Lance extensions with stainless steel pipe

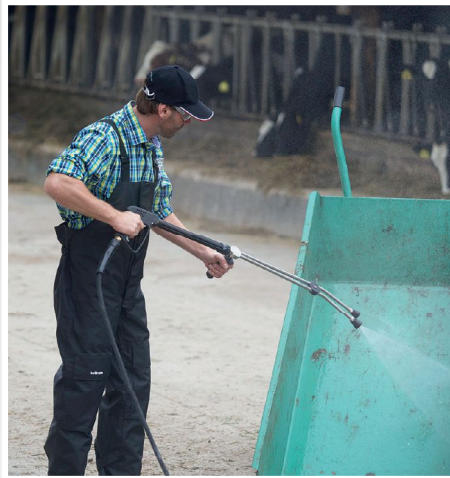


Fig. Double lance - with turning hand knob



Fig. Hook lance with stainless steel pipe + Lance extensions with stainless steel pipe



Lance extensions with stainless steel pipe

Inlet	M22x1,5 male	
Outlet	M22x1,5 female	
Length	mm	500 1000

■ with stainless steel tube

Ord.no. 150048 | 41154



Underbody lance with stainless steel pipe

Inlet	M22x1,5 male	
Nozzle size	4007	
Length	mm	1000

■ with stainless steel tube
■ for hard-to-reach areas, e.g. vehicle bottoms

Ord.no. 41075



Hook lance with stainless steel pipe

Inlet	mm	M22x1,5 male
Nozzle size	D25055	
Length	mm	500

■ with regulating nozzle and stainless steel tube
■ for hard-to-reach areas, e.g. on toilets

Ord.no. 41076



Double lance - short

Inlet	M22x1,5 male	
Nozzle size (factory fitted) **	D3035	
Dimensions LxB	mm	90x90

■ 1st nozzle opened = high-pressure
■ 1st + 2nd nozzle opened = low pressure
■ for smooth adjustment of the operating pressure

Ord.no. 121315



Fig. 1000 mm Length

Double lance - with turning knob

Inlet	M22x1,5 male	
Nozzle size (factory fitted) **	D3035	
Length	mm	660 1000

■ Stainless steel lance with twist action regulating hand-grip
■ for smooth adjustment of the operating pressure

Ord.no. 121316 | 121317



Double lance - with turning hand-grip

Inlet	M22x1,5 male	
Nozzle size (factory fitted) **	D3035	
Quick-release fittings	-	- ●
Length	mm	660 1000 1000

■ Stainless steel lance with twist action regulating hand-grip
■ for smooth adjustment of the operating pressure

Ord.no. 121311 | 12131 | 12133

**Low-pressure nozzle serially included. Order high-pressure nozzle separately.

ACCESSORY RANGE FOR HIGH-PRESSURE CLEANERS

ADAPTER FITTINGS / SPARE PARTS



Lance adapter - with thermal protective grip	
Inlet	Quick release insert D12
Outlet	M22x1,5 female
Length	mm 400

Ord.no.	12440
----------------	--------------



Quick-release insert to threaded fitting	
Inlet	Quick release insert D12
Outlet	M22x1,5 female
Length	mm 100


Ord.no.	12441
----------------	--------------



Adapter - chimney connection	
Ø	mm 200
<ul style="list-style-type: none"> ■ for exhaust extraction with oil-heated high-pressure cleaners indoors ■ for all Kränzle oil-heated therm machines 	
Ord.no.	44192



O-rings	
Packet of O-rings	9.3 x 2.4
Pack quantity	10 100
■ for Kränzle threaded fitting connections	
Ord.no.	132735 132736

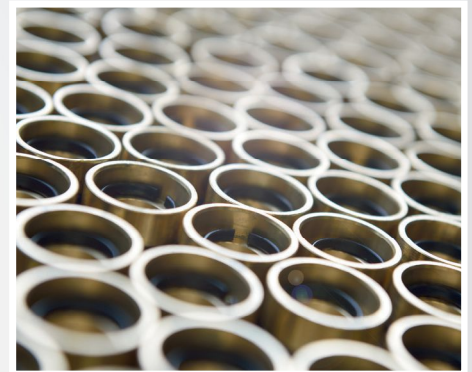

Quick-release male insert fitting D12				
Inlet	Quick release insert D12			
Outlet	1/4" female	M22x1,5 male	M12x1 IG	R 1/4" AG
Length	mm 80	85	80	85

Ord.no.	13470	13471	13474	13475
----------------	--------------	--------------	--------------	--------------



Quick-release female coupling		
Inlet	plug-in connection D12	
Outlet	1/4" female	1/4" male
Length	mm 87	83

Ord.no.	13450	13451
----------------	--------------	--------------



Hose connector / joining piece	
Inlet	M22x1,5 male
Outlet	M22x1,5 male

Ord.no.	13286
----------------	--------------



Swivel threaded fitting - revolvable	
Inlet	M22x1,5 female
Outlet	M22x1,5 male

Ord.no.	133602
----------------	---------------



Non-return valve	
Inlet	3/4" female
Outlet	3/4" male

■ with pipe ventilation	
Ord.no.	410164



Ball valve - threaded connection	
Inlet	M22x1,5 female
Outlet	M22x1,5 female

Ord.no.	132912
----------------	---------------

Please indicate the technical data of the high-pressure cleaner when placing your order.

ACCESSORY RANGE FOR HIGH-PRESSURE CLEANERS

HIGH-PRESSURE HOSES



Steel braided high-pressure hose Standard

■ with steel braided insert

DN	Length m	Steel braided layers	Operating pressure max. bar / MPa	Temperature max. °C	Inlet	Outlet	Swivel threaded fitting - revolvable (outlet)	Ord.no.
6	10	1	210 / 21	155	M22x1,5 female	M22x1,5 female	—	43416
6	15	1	210 / 21	155	M14x1.5 IG	M22x1,5 female	—	40170
6	15	1	210 / 21	155	Nipple rotatable	M22x1,5 female	—	48015
6	15	1	210 / 21	155	M22x1,5 female	M22x1,5 female	—	43829
6	20	1	210 / 21	155	M22x1,5 female	M22x1,5 female	—	434161
8	10	1	220 / 22	155	M22x1,5 female	M22x1,5 female	●	44878
8	15	1	220 / 22	155	M22x1,5 female	M22x1,5 female	●	44879
8	10	2	400 / 40	155	M22x1,5 female	M22x1,5 female	●	41081
8	20	2	400 / 40	155	M22x1,5 female	M22x1,5 female	●	443812
8	20	2	400 / 40	155	M22x1,5 female	M22x1,5 female	●	41083
8	25	2	400 / 40	155	M22x1,5 female	M22x1,5 female	●	41084
8	30	2	400 / 40	155	M22x1,5 female	M22x1,5 female	●	41080



Steel braided high-pressure hose Non-Marking (NoM)

■ with steel braided insert.

DN	Length m	Steel braided layers	Operating pressure max. bar / MPa	Temperature max. °C	Inlet	Outlet	Swivel threaded fitting - revolvable (outlet)	Ord.no.
6	10	1	210 / 21	155	M22x1,5 female	M22x1,5 female	—	434162
6	15	1	210 / 21	155	M14x1.5 IG	M22x1,5 female	—	401701
6	15	1	210 / 21	155	Nipple rotatable	M22x1,5 female	—	480151
6	15	1	210 / 21	155	M22x1,5 female	M22x1,5 female	—	438291
6	20	1	210 / 21	155	M22x1,5 female	M22x1,5 female	—	434163
8	10	2	400 / 40	155	M22x1,5 female	M22x1,5 female	●	410811
8	15	2	400 / 40	155	M22x1,5 female	M22x1,5 female	●	410821
8	20	2	400 / 40	155	M22x1,5 female	M22x1,5 female	●	443813
8	20	2	400 / 40	155	M22x1,5 female	M22x1,5 female	●	410831
8	25	2	400 / 40	155	M22x1,5 female	M22x1,5 female	●	410841
8	30	2	400 / 40	155	M22x1,5 female	M22x1,5 female	●	410801

EXPERT TIP!

NON-MARKING (NoM)

Nearly all Kränzle-high-pressure cleaners are also available in a special design to prevent dark rubber marks on sensitive light floors.

- Wheels with white tyre rubber
- High-pressure hose in grey

For availability, see pages 74-87
(Technical data)



Please indicate the technical data of the high-pressure cleaner when placing your order.

ACCESSORY RANGE FOR HIGH-PRESSURE CLEANERS

HOSE DRUMS / RETROFITTING SETS



Steel braided high-pressure hose hose connection hose			
DN		8	8
Length	m	1	2
Steel braided layers	SN	2	1
Operating pressure max.	bar / MPa	400 / 40	220 / 22
Temperature max.	°C	155	155
Inlet		M22x1,5 female	M22x1,5 female
Outlet		M22x1,5 female	M22x1,5 female

■ to connect the high-pressure pump to the hose drum

Ord.no.	41265	412651
----------------	--------------	---------------

Hose drum - retrofitting kit				
Operating pressure max. bar / MPa	210 / 21	220 / 22	400 / 40	400 / 40
Length	m	15	15	20
for device series		K 2000	therm CA therm C	Profi-Jet therm 1
■ Incl. Steel braided high-pressure hose hose and connection hose				
Ord.no.	481001	441521	412591	443921



Automatic hose reel - stainless steel		
for hose length	m	20 (DN8) 28 (DN8)
■ Stainless steel		
■ without wall holder and high-pressure hose (can be ordered separately)		
Ord.no.	412597	412598

Wall bracket		
for hose length	m	20 (DN8) 28 (DN8)
■ Stainless steel		
■ Swivelling wall holder for automatic hose reel		
Ord.no.	412601	412602

HINT!

Automatic hose reel - Set			
High-pressure hose	m	20 (DN8)	28 (DN8)
connection hose	m	2	2
■ Stainless steel			
■ Incl. high-pressure hose and connection hose			
■ Incl. swivelling wall bracket			
Ord.no.	412681	412691	

Please indicate the technical data of the high-pressure cleaner when placing your order.