



♠ ↗ ≕ ఊ ∰

COMPACT AND EFFICIENT - FOR CONVINCING CLEANING RESULTS

# **VERSATILE, POWERFUL AND COMFORTABLE**

Whether at the construction site or in the salesroom or in the workshop, whether in combination with power tools or for sucking up liquids: The Ventos-series is ideal for all cleaning tasks. An automatic start-up, an automatic switchoff in case of the suction of liquids and the large drain plug ensure safe operation. The extra-long power cable and the suction hose offer a large action radius, and a wide range of accessories enables a thorough work.







### **CONTROL PANEL**

With the Ventos series, the user always has all functions in view. The control panel allows infinitely variable regulation of the suction power.

In the case of the Ventos AC, the control panel also allows to set the interval for automatic filter cleaning.



#### **AUTOMATIC START-UP**

An integrated socket allows the connection of power tools (max. 2200 W).

The automatic start-up function switches the vacuum cleaner on when the tool is switched on, and the run-on function ensures that the suction hose is completely emptied after the tool is switched off.



#### **PRINCIPLE OF ARRANGEMENT**

This means that the accessories are always within reach. Power cable and suction hose can be spooled and stowed easily. A semicircular holder on the top, into which the suction tube can be inserted, allows the industrial vacuum cleaner to be carried comfortably by holding the suction tube securely in the recessed grip.

2

## THE FILTER CLEANING MAKES THE DIFFERENCE



### MANUAL FILTER CLEANING - VENTOS PC-MODELS


The manual Push-Clean filter cleaning of the Ventos PC ensures constant suction power and optimum cleaning performance. After pressing the push button, the airflow is diverted through the dust filter and it is cleaned in no time. The dirt simply falls into the collection container or the inserted dust bag, and the Ventos regains its full suction power.



### AUTOMATIC FILTER CLEANING – VENTOS AC-MODELS

The Automatic-Clean filter cleaning function of the Ventos AC offers added convenience. Thanks to an additional rotary knob, it is possible to set the intervals at which an automatically triggered air blast cleans the flat pleated filter. This enables long filter service lives and ensures uninterrupted and continuous operation at full suction power.

## **OPTIONAL SPECIAL ACCESSORIES**

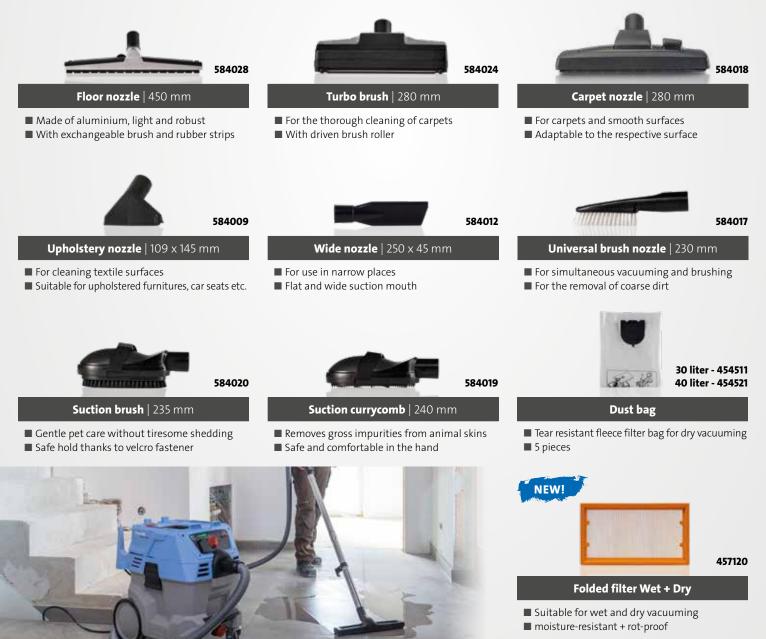

## **TECHNICAL HIGHLIGHTS**

### **SCOPE OF DELIVERY**

- Suction hose | antistatic | I: 4 m (DN 32)
- **Extension tube** | 2 pieces | each I: 480 mm
- **Hand tube** | curved | with air slide
- **Folded filter** | 1 piece
- Dust bag | 5 pieces
- Disposal bag | 1 piece
- Tool adapter | Use of power tools | Ø 25 mm
- **Floor nozzle** | w: 360 mm | Inserts for wet and dry vacuuming
- Joint nozzle | I: 300 mm
- Brush nozzle | Ø 70 mm
- Comfort accessories storage



MODEL	Ventos 32 L/PC	Ventos 42 L/PC	Ventos 32 L/AC	Ventos 42 L/AC
Ord.no.	580000	580040	580020	580060

## **TECHNICAL DATA**

Filter cleaning		Push-Clean filter cleaning		Automatic-Clean filter cleaning	
Dust class		L	L	L	L
Volumetric flow rate turbine max	l/min	4500	4500	4500	4500
Depression turbine max	kPa   mbar	25   250	25   250	25   250	25   250
Connection	V   ~   Hz   A	230   1   50   16	230   1   50   16	230   1   50   16	230   1   50   16
Power consumption (Pnom)	W	1200	1200	1200	1200
Container volume	L	30	40	30	40
Filling volume water intake	L	30	40	30	40
Sound pressure level (at the workplace)	db (A)	68.3	68.3	68.3	68.3
Protection class		IPx4	IPx4	IPx4	IPx4
Mains connection cable	m	7.5	7.5	7.5	7.5
Dimensions L   W   H	mm	590   365   565	590   365   645	590   365   565	590   365   645
Weight	kg	18.5	19	19.3	19.8

YOUR DEALER WILL BE GLAD TO ADVISE YOU!

© Kränzle • valid from 01.01.2024 • Ord.no.: 304806-EN • While stocks last • Freight & delivery time on request • Payment by agreement • Errors and omissions excepted • We assume no liability for printing errors